


PROPANE ACCESSORIES

PROPANE ACCESSORIES

FLARE FITTINGS

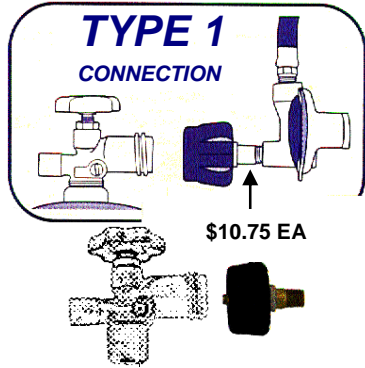

TYPE 1 CONNECTION

\$10.75 EA

**Adapter Nut
QCC Type 1 Connection**


Item No.	Male Outlet	Female Conn – RH
G1851-A02	1/4" NPT	1-5/16" Acme

Connects the grill regulator to Type 1 valves shown. Provides 110,000 btu/hr excess flow protection & thermal shutoff protection for grill cylinders. After closure, bypass flow is only 10 CFH at 100 psi inlet pressure. The thermal shutoff occurs when the temperature of the plastic coupling reaches 240°F to 300°F and the material softens, allowing the check valve to close off the flow.

**Coupling, Plug
5LPA-9 \$6.65 EA**

5LPA-9 Plug (use only with Sturgis quick-disconnect)
5LPA-10C Plug (use only with Hansen quick-disconnect)
Make quick-disconnect plug by 1/4" M NPT. Connects the grill regulator to a 3329LGQ4.0 quick-disconnect cylinder valve.

5LPA-10C \$12.00 EA



TYPE 2 CONNECTION


F276334 Quick-Disconnect Adapter for Standard POL valves

Male POL by quick-disconnect coupler. Converts standard POL cylinder valve to Type 2 quick-disconnect valve. Takes the 5LPA-9 or 5LPA-10C PLUG \$32.50 EA

Filling Adaptor for Type 2 quick-disconnect couplers

Female POL by plug nipple for filling into the 5LPN quick disconnect coupling for grills. Does not include a check valve in outlet. 5LPA-FP \$8.50 EA

Swivel Male POL

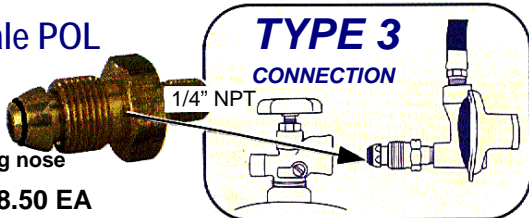

TYPE 3 CONNECTION

G1638 \$8.50 EA

"O" ring nose

1/4" NPT

More hoses on page 142

CONSTRUCTION: Specifically compounded heat resistant synthetic rubber seamless inner tube. Single braid of stainless steel wire. The hose is impregnated with oil and mildew-resistant rubber compound.


APPLICATION: For LP-Gas engine fuel lines.

TEMPERATURE RATING: -40° TO +257° F
Inner tube specifically compounded to resist temperatures



Reserve Gas Adaptors

G487 \$11.50 EA



G487 1"-20 F x F POL Allows you to connect a disposable cylinder to a regulator that has a POL inlet, providing a reserve gas supply to outdoor grill, etc.

LIFT TRUCK SAFETY

CHECK CONNECTORS

Part No. 1428M



\$22.14 EA

MALE LIFT TRUCK CONNECTOR
1-1/4" Acme x 3/8" F. NPT. Internal check mechanism is easily replaceable. Connector is interchangeable with Rego 7141M and Fisher M220M.

For same fitting W/Female – 1-1/4" Acme Thread.
#1428F \$22.14 EA



COUPLINGS FOR SS25UL HOSE

PRICE PER FOOT 10' PER SIZE	ITEM	HOSE ID (IN)	HOSE OD (IN)	MINIMUM BURST (PSI)	WORKING PRESSURE (PSI)
\$5.42 EA	SS25UL-4	3/16"	.52	1750	350
\$5.57 EA	SS25UL-6	5/16"	.68	1750	350
\$5.64 EA	SS25UL-8	13/32"	.77	1750	350
\$6.78 EA	SS25UL-10	1/2"	.92	1750	350

ITEM	HOSE ID	CONNECTION	PRICE
20820-4-4	3/16"	Female 1/4" OD Flare	\$3.92 EA
20820-6	5/16"	Female 3/8" OD Flare	\$6.71 EA
20820-8-8	13/32"	Female 1/2" OD Flare	\$7.17 EA
20820-8-10	1/2"	Female 1/2" OD Flare	\$10.07 EA
20820	1/2"	Female 5/8" OD Flare	\$10.78 EA
20420	1/2"	Male 5/8" OD Flare	\$13.42 EA
20420-6	5/16"	Male 3/8" OD Flare	\$6.85 EA
20120-6	5/16"	Male 1/4" NPT	\$5.57 EA
20120-6-6	5/16"	Male 3/8" NPT	\$6.02 EA
27920-6	5/16"	Female 3/8" OD Flare (90°)	\$13.02 EA
27920-8	13/32"	Female 1/2" OD Flare (90°)	\$15.85 EA
27720-6	5/16"	Female 3/8" OD Flare (45°)	\$14.08 EA
27720-8	13/32"	Female 1/2" OD Flare (45°)	\$15.62 EA

"Mr. Heater" - Original Mr. Heater Series

- Variable Output Of 8, 12 & 14,000 BTU/Hr.
- Hi/Medium/Low Regulator
- Safety Shutoff
- Soft Nose P.O.L.
- For Direct Connection To 4-20 lb. Bulk Cylinder

Features & Uses Of Infra-Red Heaters

- Efficient, fast heat, economical, convenient, quiet, durable, minimal maintenance, full 1-year warranty.
 - Typical uses: Patios, workshops, sheds, poolside areas, large open sided tents, animal stalls, vehicle maintenance, outdoor jobs
- Portable Infra-Red Heaters Are Designed For Outdoor Use Only. Cylinders Not Included.



PLUG-B \$0.75 EA

Female Acme Caps



1-1/4" #1875-3A \$2.75 EA
1-3/4" #1850-10 (W / STRAP) \$5.95 EA