



CST 800FC & ST2600 Series “VanGuard™” Straight Cutting Torches

- Hose connections are 9/16"-18 "B"
- Works with all fuel gases. There are pressure restrictions for different gases. VanGuard™ Torch Handles also feature Victor Traditional threaded assemblies for quick economical repair if service is necessary.



UL LISTED

CST 800FC Series

- For use with any fuel gas, 2 PSIG and above.
- Use with Series 3 Cutting Tips.
- Hose connections are 9/16"-18".
- Cutting capacity - 1/8"/3.25mm to 6"/152mm
- VanGuard™ Series cutting torch with built-in patented flashback arrestors and reverse flow check valves for added safety.

CST800FC SERIES ORDERING INFORMATION

Part No.	Lever Position	Tip Series	Head Angle	Length	Price
CST800FC	Top Front	3	90°	17"/43cm	\$395.00 EA



SST2600FC

ST2600 “VANGUARD” SERIES ORDERING INFORMATION

Part No.	Lever Position	Tip Series	Head Angle	Length	Price
SST2600FC	Top Rear	1	90°	17"/43cm	\$417.86 EA
SST2601FC	Top Rear	1	75°	17"/43cm	\$450.10 EA
ST2600FC	Top Rear	1	90°	21"/53cm	\$422.29 EA
ST2601FC	Top Rear	1	75°	21"/53cm	\$455.58 EA
ST2630FC	Top Rear	1	90°	36"/91cm	\$608.43 EA
ST2631FC	Top Rear	1	75°	36"/91cm	\$688.53 EA
ST2650FC	Top Rear	1	90°	48"/122cm	\$745.86 EA
ST2651FC	Top Rear	1	75°	48"/122cm	\$793.12 EA
ST2652FC	Top Rear	1	180°	48"/122cm	\$867.66 EA
ST2670FC	Top Rear	1	90°	72"/184cm	\$873.38 EA
ST2671FC	Top Rear	1	75°	72"/184cm	\$1015.46 EA
ST2672FC	Top Rear	1	180°	72"/184cm	\$1059.05 EA

ST 2600FC “VanGuard™” Series

- For use with any fuel gas.
- Uses Series 1 cutting tips.
- Cutting capacity 1/8"/3.25mm to 12"/305mm.
- Includes built-in patented flashback arrestors and reverse flow check valves for added safety.

UL LISTED

Note: Other torch models available. Ask for details.



Ultra-Line

Portable Straight Line Track Cutter (Oxy/Fuel & Plasma)

16" Long x 7-1/4" Wide x 5-3/4" High
(Without Torch Rigging)


- Solid-state control (Jog/Off/On)
- Convenient, easily accessible controls & clutch lever
- Speed range of 3-110 IPM (with High / Low)
- Sturdy one-piece cast aluminum housing
- Knurled drive wheels, for positive traction
- 50-90 amp plasma capability
- Extensive variety of accessory equipment for expanded capability
- Standard 115 VAC 60 Hz power source
- No “warm up time” is required to start carriage travel. The carriage is driven by a reversible DC motor with built-in solid state regulation.
- Carriage weight is approximately 22 lbs. without accessories.
- Oxy/Fuel cutting capacity is 4" (6" with optional Heat Shield)

Part Number

2237258

\$2,150.00 ea

(Includes 6' Track and Torch Holder)

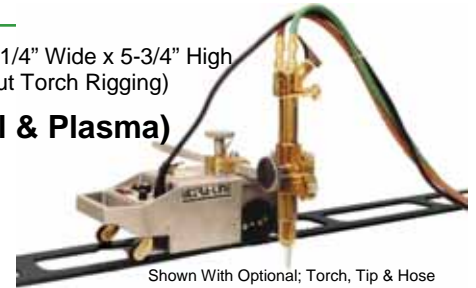

Shown With Optional; Torch, Tip & Hose
(Go Forward 3-Pages for Machine Torch)

Additional Track Sections

#16V82 (standard)	6 ft.	\$299.95 ea
#20086	7.5 ft.	\$561.30 ea
#2223156	9 ft.	\$639.50 ea

Circle Cutting Attachment #16V84 \$199.99 ea

Consists of an 18 inch (457 mm) radius bar and pivot system permitting circles ranging from 2" to 54" diameter to be cut.

Heat Shield Kit #995586 \$98.50 ea

Recommended when the carriage gets hot-to-the-touch. Includes a fixed, plate and riding shield to protect machine components when engaged in prolonged cutting or cutting close to the carriage.

Counterweight #995587 \$195.20 ea

Used when an off-balance condition exists due to weight of equipment mounted to one side of the carriage.